



TINNED COPPER CABLE TERMINAL ENDS (LUGS)

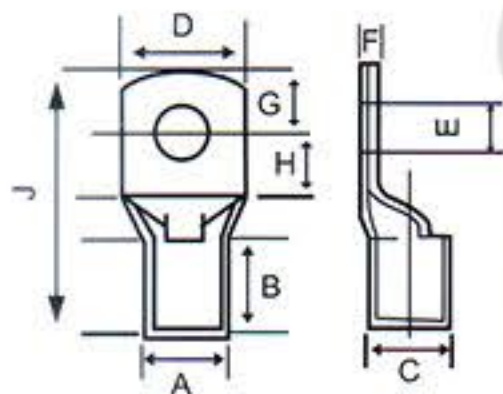

Cable Size SQ. mm	Stud Hole E	A	C	D	F	G	H	B	J	Cat #
1.5	4.2	1.8	3.7	8	1.0	4	5	5	16	TCTE1.5-4
1.5	5.2	1.8	3.7	8	1.0	4	5	5	16	TCTE1.5-5
1.5	6.5	1.8	3.7	10	0.8	5	6	5	18	TCTE 1.5-6
2.5	4.2	2.4	4.0	8	1.0	4	5	7	18	TCTE 2.5-4
2.5	5.2	2.4	4.0	10	0.8	5	6	7	20	TCTE 2.5-5
2.5	6.5	2.4	4.0	10	0.8	5	6	7	20	TCTE2.5-5-6
4	4.2	3.1	4.8	10	1.0	5	6	7	20	TCTE4-4
4	5.2	3.1	4.8	10	1.0	5	6	7	20	TCTE4-5
4	6.5	3.1	4.8	10	1.0	5	6	7	20	TCTE4-6
6	5.2	3.8	5.5	10	1.2	5	6	9	23	TCTE6-5
6	6.5	3.8	5.5	10	1.2	5	6	9	23	TCTE6-6
6	8.2	3.8	5.5	12	1.0	6	9	9	27	TCTE6-8
10	6.5	4.5	6.2	12	1.2	6	7	9	25	TCTE10-6
10	8.2	4.5	6.2	12	1.2	6	9	9	27	TCTE10-8
10	10.5	4.5	6.2	15	1.4	8.5	10.5	10	32	TCTE10-10
16	6.5	5.4	7.1	12	1.4	7	7	12	30	TCTE16-6
16	8.2	5.4	7.1	12	1.4	7	9	12	32	TCTE16-8
16	10.5	5.4	7.1	15	1.0	8	12	12	36	TCTE16-10
16	12.7	5.4	7.1	16	1.0	8	12	12	36	TCTE16-12
25	6.5	6.8	8.8	13	2.0	6	7	14	30	TCTE25-6
25	8.2	6.8	8.8	13	2.0	6	7	14	30	TCTE25-8
25	10.5	6.8	8.8	16	1.6	9	11	14	37	TCTE25-10
25	12.7	6.8	8.8	18	1.2	11	13	14	41	TCTE25-12
35	6.5	8.2	10.6	15	2.4	9	9	14	35	TCTE35-6
35	8.4	8.2	10.6	15	2.4	9	9	14	35	TCTE35-8
35	10.5	8.2	10.6	15	2.4	9	9	14	35	TCTE35-10
35	12.7	8.2	10.6	18	2.0	12	13	15	45	TCTE35-12
50	6.5	9.5	12.4	18	2.9	10	11	19	43	TCTE50-6
50	8.4	9.5	12.4	18	2.9	10	11	19	43	TCTE50-8
50	10.5	9.5	12.4	18	2.9	10	11	19	43	TCTE50-10
50	12.7	9.5	12.4	18	2.9	10	11	19	43	TCTE50-12
70	8.4	11.2	14.7	21	3.5	12	13	21	50	TCTE70-8
70	10.5	11.2	14.7	21	3.5	12	13	21	50	TCTE70-10
70	12.7	11.2	14.7	21	3.5	12	13	21	50	TCTE70-12
95	8.4	13.5	17.4	25	3.9	13	13	23	55	TCTE95-8
95	10.5	13.5	17.4	25	3.9	13	13	23	55	TCTE95-10
95	12.7	13.5	17.4	25	3.9	13	13	23	55	TCTE95-12
95	14.7	13.5	17.4	25	3.9	13	13	23	55	TCTE95-14
120	8.2	15.0	19.4	28	4.4	14	14	25	60	TCTE120-8
120	10.5	15.0	19.4	28	4.4	14	14	25	60	TCTE120-10
120	12.7	15.0	19.4	28	4.4	14	14	25	60	TCTE120-12
120	17.0	15.0	19.4	28	4.4	14	14	25	60	TCTE120-16
150	8.4	16.5	21.2	30	4.7	16	16	30	69	TCTE150-8
150	10.5	16.5	21.2	30	4.7	16	16	30	69	TCTE150-10
150	12.7	16.5	21.2	30	4.7	16	16	30	69	TCTE150-12
150	14.7	16.5	21.2	30	4.7	16	16	30	69	TCTE150-14
150	17.0	16.5	21.2	30	4.7	16	16	30	69	TCTE150-16
185	10.5	18.5	23.5	34	5.0	17	17	36	78	TCTE185-10
185	13.0	18.5	23.5	34	5.0	17	17	36	78	TCTE185-12
185	14.7	18.5	23.5	34	5.0	17	17	36	78	TCTE185-14
185	17.0	18.5	23.5	34	5.0	17	17	36	78	TCTE185-16
240	10.5	21.0	26.5	38	5.5	20	20	42	92	TCTE240-10
240	13.0	21.0	26.5	38	5.5	20	20	42	92	TCTE240-12
240	14.7	21.0	26.5	38	5.5	20	20	42	92	TCTE240-14
240	17.0	21.0	26.5	38	5.5	20	20	42	92	TCTE240-16
240	21.0	21.0	26.5	38	5.5	20	20	42	92	TCTE240-20

Cable Size SQ. mm	Stud Hole E	A	C	D	F	G	H	B	J	Cat #
300	13.0	23.5	30.0	43	6.5	22	22	46	101	TCTE300-12
300	14.7	23.5	30.0	43	6.5	22	22	46	101	TCTE300-14
300	17.0	23.5	30.0	43	6.5	22	22	46	101	TCTE300-16
300	21.0	23.5	30.0	43	6.5	22	22	46	101	TCTE300-20
400	14.7	28.5	36.5	50	8.0	26	26	49	114	TCTE400-14
400	17.0	28.5	36.5	50	8.0	26	26	49	114	TCTE400-16
400	21.0	28.5	36.5	50	8.0	26	26	49	114	TCTE400-20
500	14.7	30.0	39.0	56	9.0	28	28	53	124	TCTE500-14
500	17.0	30.0	39.0	56	9.0	28	28	53	124	TCTE500-16
500	21.0	30.0	39.0	56	9.0	28	28	53	124	TCTE500-20
630	17.0	35.0	45.0	65	10.0	33	33	61	144	TCTE630-16
630	21.0	35.0	45.0	65	10.0	33	33	61	144	TCTE630-20
800	BL	39.0	50.6	73	11.6	35	40	78	170	TCTE800-BL
800	17.0	39.0	50.6	73	11.6	35	40	78	170	TCTE800-16
800	21.0	39.0	50.6	73	11.6	35	40	78	170	TCTE800-20
1000	BL	43.0	56.2	81	13.2	45	45	90	200	TCTE1000-BL
1000	17.0	43.0	56.2	81	13.2	45	45	90	200	TCTE1000-16
1000	21.0	43.0	56.2	81	13.2	45	45	90	200	TCTE1000-20


TINNED COPPER CABLE TERMINAL ENDS - 4 HOLE LUGS

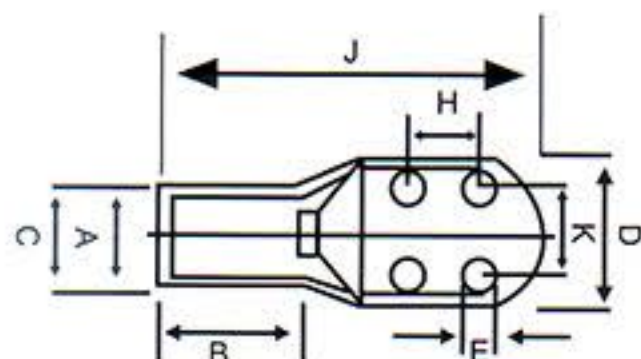

Cable Size SQ. mm	E	A	C	B	D	K	H	J	Cat #
500	8.5	30.0	39.0	53	56	17	20	124	TCTE4-500
630	8.5	35.0	45.0	61	65	17	25	144	TCTE4-630
800	8.5	39.0	50.6	78	73	20	30	170	TCTE4-800
1000	8.5	43.0	56.2	90	81	25	40	200	TCTE4-1000

TINNED COPPER IN LINE CONNECTOR (FERRULES)


STANDARD

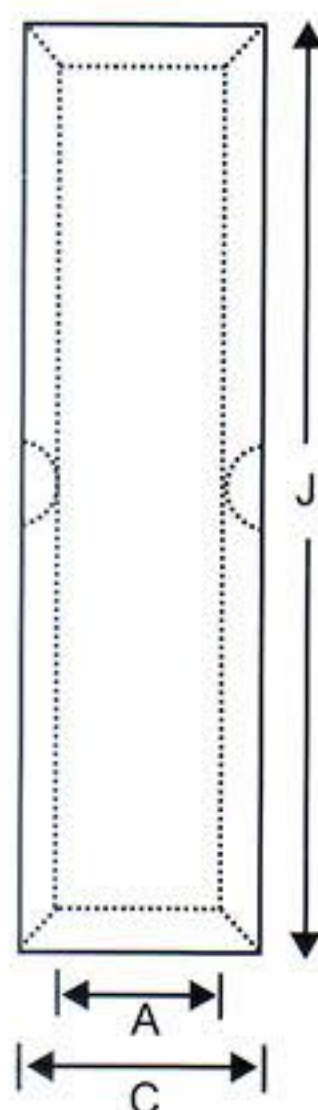

Cable Size SQ. mm	A	C	J	Cat #
1.5	1.8	3.7	12	TCFS 1.5
2.5	2.4	4.0	15	TCFS 2.5
4	3.1	4.8	15	TCFS 4
6	3.8	5.5	15	TCFS 6
10	4.5	6.2	20	TCFS 10
16	5.4	7.1	20	TCFS 16
25	6.8	8.8	32	TCFS 25
35	8.2	10.6	36	TCFS 35
50	9.5	12.4	40	TCFS 50
70	11.2	14.7	45	TCFS 70
95	13.5	17.4	45	TCFS 95
120	15.0	19.4	45	TCFS 120
150	16.5	21.2	55	TCFS 150
185	18.5	23.5	60	TCFS 185
240	21.0	26.5	80	TCFS 240
300	23.5	30.0	85	TCFS 300
400	28.5	36.5	85	TCFS 400
500	30.0	39.0	100	TCFS 500
630	35.0	45.0	110	TCFS 630
800	39.0	50.6	150	TCFS 800
1000	43.0	56.2	170	TCFS 1000

LONG

Cable Size SQ. mm	A	C	J	Cat #
1.5	1.8	3.7	22	TCFL 1.5
2.5	2.4	4.0	22	TCFL 2.5
4	3.1	4.8	22	TCFL 4
6	3.8	5.5	22	TCFL 6
10	4.5	6.2	22	TCFL 10
16	5.4	7.1	44	TCFL 16
25	6.8	8.8	47	TCFL 25
35	8.2	10.6	47	TCFL 35
50	9.5	12.4	47	TCFL 50
70	11.2	14.7	50	TCFL 70
95	13.5	17.4	54	TCFL 95
120	15.0	19.4	65	TCFL 120
150	16.5	21.2	65	TCFL 150
185	18.5	23.5	65	TCFL 185
240	21.0	26.5	89	TCFL 240
300	23.5	30.0	89	TCFL 300
400	28.5	36.5	90	TCFL 400
500	30.0	39.0	115	TCFL 500
630	35.0	45.0	115	TCFL 630
800	39.0	50.6	230	TCFL 800
1000	43.0	56.2	230	TCFL 1000

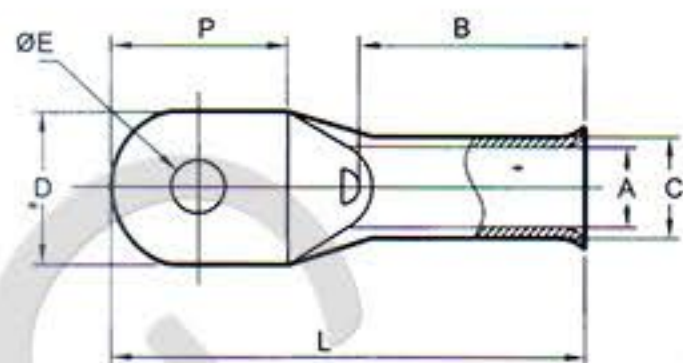


TYPE : BELL MOUTHED

Material : E-copper
 Finish : Electro - Tinned
 Features : Bell Mouth Entry, With Or Without Inspection Hole
 Suitability : For Stranded To Fine Stranded Copper Cable



Cable mm2	Stud Hole	DIMENSION IN mm						Cat #
		A	C	D	P	B	L	
10	5.2	4.4	6.9	11	11	10	29	TB10-5
	6.2			12	18	11	38	TB10-6
	8.2							TB10-8
	10.5							TB10-10
	13			17	24		41	TB10-12
16	5.2	5.6	8	11	11	11	29	TB16-5
	6.2				18		38	TB16-6
	8.2			TB16-8				
	10.5			TB16-10				
	13			18	22		42	TB16-12
25	6.2	7.0	9.5	13	19	14	42	TB25-6
	8.2			16	23		47	TB25-8
	10.5							TB25-10
	13							TB25-12
35	6.2	8.2	11	16	19	15	43	TB35-6
	8.2			18	22		48	TB35-8
	10.5							TB35-10
	13							TB35-12
	14			20	24		50	TB35-14
50	6.5	9.5	12.1	18	18	18	48	TB50-6
	8.2				22		52	TB50-8
	10.5							TB50-10
	13							TB50-12
	14			20	27		55	TB50-14
	17			22	27		55	TB50-16
70	6.2	11.5	15	21	20	19	50	TB70-6
	8.2				22		54	TB70-8
	10.5							TB70-10
	13							TB70-12
	14			24	34		63	TB70-14
	17							TB70-16
95	8.2	13.5	17	25	24	24	60	TB95-8
	10.5				32		67	TB95-10
	13							TB95-12
	14							TB95-14
	17							TB95-16
120	10.5	15.0	19	28	29	29	72	TB120-10
	13				76		TB120-12	
	14						TB120-14	
	17						TB120-16	
	21			30			33	76

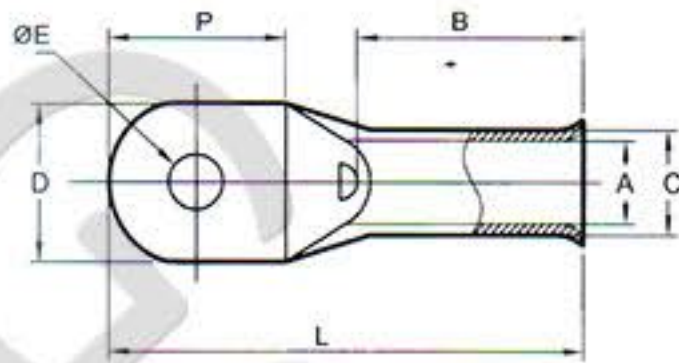

TYPE : BELL MOUTHED

Material : E-copper
 Finish : Electro - Tinned
 Features : Bell Mouth Entry, With Or Without Inspection Hole
 Suitability : For Stranded To Fine Stranded Copper Cable




Cable mm ²	Stud Hole	DIMENSION IN mm						Cat #
		A	C	D	P	B	L	
150	10.5	16.5	21	30	32	30	74	TB150-10
	13							TB150-12
	14							TB150-14
	17							TB150-16
	21							TB150-20
185	10.5	18.5	23.4	34	37	32	85	TB185-10
	13							TB185-12
	14							TB185-14
	17							TB185-16
	21							TB185-20
240	10.5	21	26	38	42	36	93	TB240-10
	13							TB240-12
	14							TB240-14
	17							TB240-16
	21							TB240-20
300	10.5	23	28	40	47	44	110	TB300-10
	13							TB300-12
	14							TB300-14
	17							TB300-16
	21							TB300-20
400	13	27	36	51	48	44	111	TB400-12
	14							TB400-14
	17							TB400-16
	21							TB400-20
500	10.5	30	38.1	55	50	56	127	TB500-10
	13							TB500-12
	14							TB500-14
	17							TB500-16
	21							TB500-20
630	10.5	34	44	62	52	50	130	TB630-10
	13							TB630-12
	14							TB630-14
	17							TB630-16
	21							TB630-20
800	21	38	49	70	68	56	164	TB800-20
	27							TB800-25
1000	21	42.5	53	77	68	56	169	TB1000-20
	27							TB1000-25

LUGS FOR TRANSFORMER

TYPE : LUGS WITH FOUR HOLES


Material : E-copper
Finish : Electro - Tinned
Features : With or Without Inspection Hole

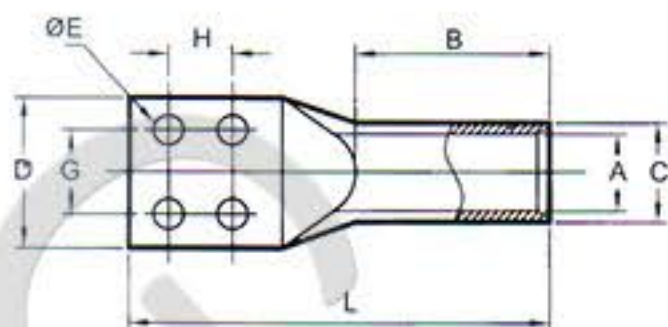

Cable mm ²	ØE	DIMENSION IN mm							Cat #
		A	C	D	G	H	B	L	
240	8.5	21	28	58	35	25	45	110	TT240-4E8
	10.5								TT240-4E10
300	8.5	23.5	31	58	35	25	50	115	TT300-4E8
	10.5								TT300-4E10
400	8.5	27	36.5	58	35	25	52	120	TT400-4E8
	10.5								TT400-4E10
500	8.5	30	39	58	35	25	56	124	TT500-4E8
	10.5								TT500-4E10
630N	8.5	34	42	60	35	25	70	145	TT630N-4E8
	10.5								TT630N-4E10
630	8.5	34	44	65	35	25	66	145	TT630-4E8
	10.5								TT630-4E10
800	8.5	39	50.6	73	35	25	90	170	TT800-4E8
	10.5								TT800-4E10
1000	8.5	43	56.2	81	35	25	100	200	TT1000-4E8
	10.5								TT1000-4E10


TYPE : LUGS WITH TWO HOLES

Material : E-copper
Finish : Electro - Tinned
Features : With or Without Inspection Hole

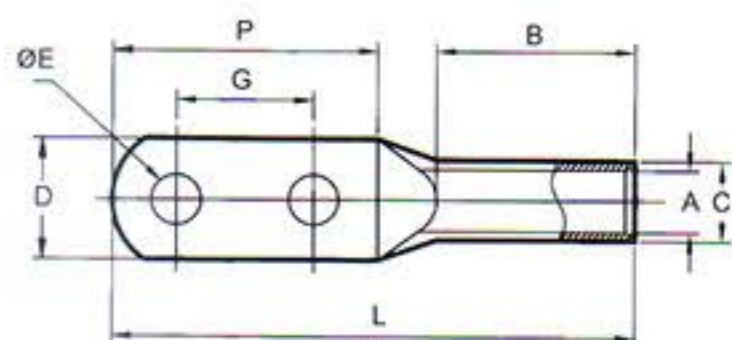

Cable mm ²	ØE	DIMENSION IN mm							Cat #
		A	C	D	G	H	B	L	
16	10.5	5.4	7.1	15	40	64	15	84	T-2E16-10
25	10.5	6.8	8.8	18	40	64	15	87	T-2E25-10
35	10.5	8.2	10.6	18	40	66	17	90	T-2E35-10
50	13	9.5	12.4	22.5	40	66	27.5	102	T-2E50-12
70	13	11.2	14.7	24	40	67	30	107	T-2E70-12
95	13	13.5	17.4	26	40	67	33	111	T-2E95-12
120	13	15.0	19.4	28	40	70	36	118	T-2E120-12
150	3	16.5	21.2	31	40	72	44	130	T-2E150-12
185	3	18.5	23.5	35	40	76	55	149	T-2E185-12
240	3	21.0	26.5	38	40	78	55	150	T-2E240-12
300	13	23.5	30.0	42	40	78	55	160	T-2E300-12

DIMENSION 'G' AS PER REQUIREMENT ALSO AVAILABLE

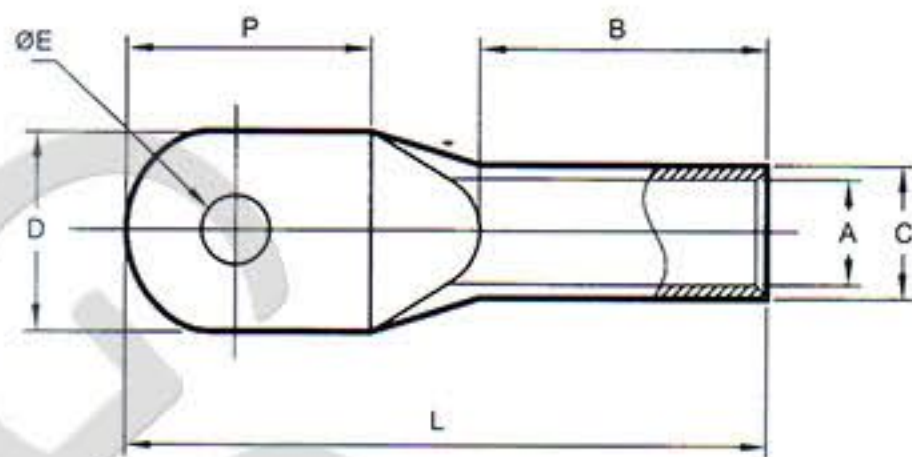

TYPE : N-SERIES

Material : E-copper

Finish : Electro - Tinned

Features : With Or Without Inspection Hole



Cable mm ²	Stud Hole	DIMENSION IN mm						Cat #
		A	C	D	P	B	L	
6	5.2	3.8	5.5	10	14	9	28	TN 6-5
	6.2							TN 6-6
10	5.2	4.5	6.2	11	15	9	28	TN 10-5
	6.2							TN 10-6
	10.5			16	25	12	43	TN 10-10
16	6.2	5.5	7	12	16	12	36	TN 16-6
	8.2							TN 16-8
	10.5			16	24	12	43	TN 16-10
	13							TN 16-12
25	6.2	6.8	8.8	13	16	12	37	TN 25-6
	8.2							TN 25-8
	10.5			16	25	12	43	TN 25-10
	13							TN 25-12
35	6.2	8.2	10.6	15	20	18	43	TN 35-6
	8.2							TN 35-8
	10.5			17	26	18	50	TN 35-10
	13							TN 35-12
50	6.2	9.5	12.4	18	23	16	49	TN 50-6
	8.2							TN 50-8
	10.5			18	23	16	49	TN 50-10
	13							TN 50-12
70	8.2	11.2	14.7	21	25	20	55	TN 70-8
	10.5							TN 70-10
	13			21	25	20	55	TN 70-12
	14							TN 70-14
95	10.5	13.5	17.4	25	27	23	62	TN 95-10
	13							TN 95-12
	14			25	33	23	68	TN 95-14
	17							TN 95-16
120	10.5	15.0	19.4	28	28	28	72	TN 120-10
	13							TN 120-12
	14			28	33	28	77	TN 120-14
	17							TN 120-16
	21							TN 120-20
150	10.5	16.5	21	30	32	30	75	TN 150-10
	13							TN 150-12
	17			30	32	30	75	TN 150-16
	21							TN1 50-20
185	10.5	18.5	23.5	34	38	31	85	TN 185-10
	13							TN 185-12
	14			34	38	31	85	TN 185-14
	17							TN 185-16
	21							TN 185-20
240	13	21.0	26.5	38	43	35	95	TN 240-12
	17							TN 240-16
	21			38	43	35	95	TN 240-20
300	17	23.5	30	43	47	44	110	TN 300-16
	21							TN 300-20
400	17	28.5	36.5	52	48	40	112	TN 400-16
	21							TN 400-20
500	17	30.0	37	55	50	75	148	TN 500-16
	21							TN 500-20
630	17	34.0	41	60	50	70	148	TN 630-16
	21							TN 630-20

COMPRESSION THROUGH JOINTS (NON TENSION)

TYPE : COMPRESSION JOINTS

Material : E-Copper
Finish : Untinned
Features : UP to 33 KV




COMPRESSION JOINTS

Cable mm ²	DIMENSION IN mm			Cat #
	A	C	L	
25	7.0	12.5	60	CJ 25
35	8.2	12.5	60	CJ 35
50	10.0	14.5	65	CJ 50
70	11.5	16.5	65	CJ 70
95	13.5	19.0	90	CJ 95
120	15.5	21.0	90	CJ 120
150	16.5	23.5	105	CJ 150
185	19.0	25.0	105	CJ 185
240	21.5	28.5	125	CJ 240
300	23.5	31.5	125	CJ 300
400	27.5	37.5	160	CJ 400

TYPE : BUTT JOINTS


Material : E-Copper
Finish : Electro tinned

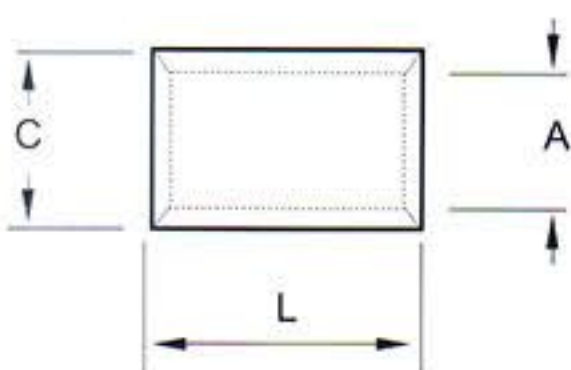

Cable mm ²	DIMENSION IN mm			Cat #
	A	C	L	
1.5	1.8	3.7	6.0	BJ 1.5
2.5	2.4	4.0	6.0	BJ 2.5
4	3.1	4.8	9.0	BJ 4
6	3.8	5.5	9.0	BJ 6
10	4.5	6.2	10.4	BJ 10
16	5.4	7.9	11.2	BJ 16
35	8.2	11.0	15.5	BJ 35
50	9.5	13.0	15.5	BJ 50
70	11.2	14.7	17.0	BJ 70
95	13.5	17.4	20.5	BJ 95
120	15.0	19.4	20.5	BJ 120
150	16.5	21.2	23.0	BJ 150

TYPE : WEAK BACK FERRULES


Material : E- Copper
Finish : Electro Tinned

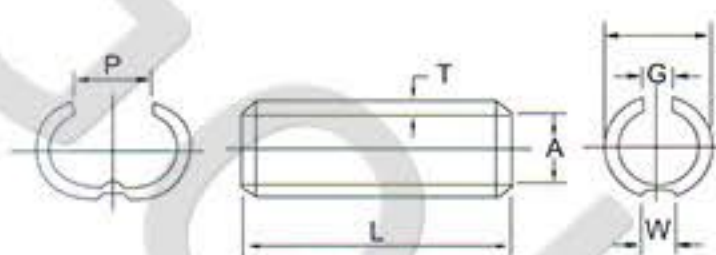

Cable mm ²	DIMENSIONS IN mm							Cat #
	A	C	G	L	T	P	W	
6	3.0	4.6	2	20	0.8	3	-	WB 6
10	4.4	6.0	2	25	0.8	4	-	WB 10
16	5.5	7.5	2	25	1.0	5	1.5	WB 16
25	7.0	9.0	2	30	1.0	7	1.5	WB 25
35	8.0	10.4	2	35	1.2	8	1.5	WB 35
50	9.5	11.9	2	40	1.2	9	1.5	WB 50
70	12.0	14.8	3	45	1.4	12	3	WB 70
120	15.5	18.7	4	55	1.6	15	3	WB 120
150	17.0	20.6	4	60	1.8	16	3.4	WB 150
185	18.5	22.9	4	65	2.2	18	5	WB 185
225	20.5	24.9	5	75	2.2	20	5	WB 225
240	22.0	26.4	5	80	2.2	21	5	WB 240
300	24.0	29.6	5	85	2.8	23	5	WB 300
400	28.5	34.7	7	95	3.1	27	5	WB 400
500	30.5	37.5	7	105	3.5	30	5	WB 500
625	34.5	42.5	8	115	4.0	33	5	WB 625

TYPE : SCREW CONNECTORS

Material : Brass
Finish : Electro Tinned
Screws : Zinc Plated Steel

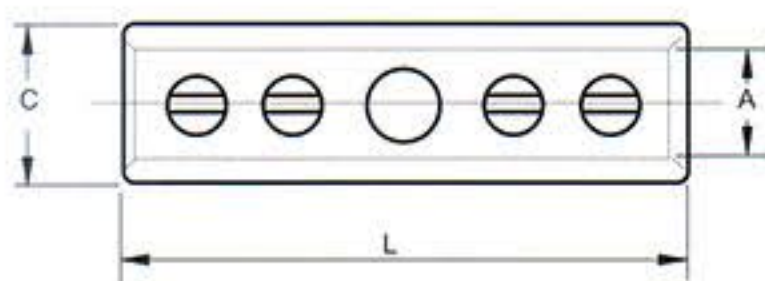


Cable mm ²	DIMENSIONS IN mm					Cat #
	A	C	G	No.s of Screws	Screw Size	
10	4.4	9	30	2	M4	SC 10
16	5.5	10	40	4	M4	SC 16
25	6.8	11	45	4	M5	SC 25
35	8.2	13	45	4	M5	SC 35
50	9.5	15	48	4	M6	SC 50
70	11.2	17	52	4	M6	SC 70
95	13.5	20	55	4	M8	SC 95
120	15.0	22	55	4	M8	SC 120
150	16.5	25	60	4	M10	SC 150
185	19.0	27	60	4	M10	SC 185
240	21.0	29	65	4	M10	SC 240
300	23.5	32	65	4	M10	SC 300

COMPRESSION JOINTS

TYPE : COMPRESSION CONNECTORS WITH SOLID BARRIER

Material : E-Copper
Finish : Electro Tinned

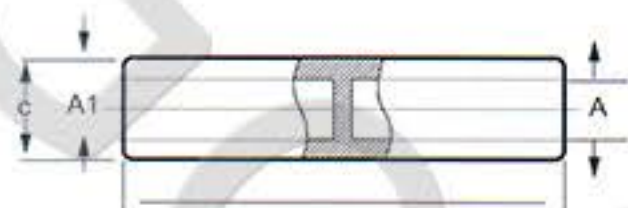


Cable Size		A	A1	C	L	Cat #
mm2	mm2					
35	35	8.2	08.2	11	60	SB 35
35	50	8.2	10	13	60	SB 3550
50	50	10.0	10	13	60	SB 50
50	70	10.0	11.5	16	65	SB 5070
70	70	11.5	11.5	16	65	SB 70
70	95	11.5	14	20	85	SB 7095
95	95	14.0	14	20	85	SB 95
95	120	14.0	15.5	22	95	SB 95120
120	120	15.5	15.5	22	95	SB 120
120	150	15.5	17	23.5	105	SB 120150
150	150	17.0	17	23.5	105	SB 150
150	185	17.0	19	24	115	SB 150185
120	185	15.5	19	24	115	SB 120185
185	185	19.0	19	24	115	SB 185
185	240	19.0	21.5	28	125	SB 185240
240	240	21.5	21.5	28	125	SB 240
150	240	17.0	21.5	28	125	SB 150240
240	300	21.5	24.5	31.5	140	SB 240300
185	300	19.0	24.5	31.5	140	SB 185300
300	300	24.5	24.5	31.5	140	SB 300
300	400	24.5	27.5	36.5	170	SB 300400
400	400	27.5	27.5	36.5	170	SB 400


MECHANICAL CABLE LUGS

TYPE : BOLTED WITH 2 SCREWS AND 4 SCREWS

Material : Brass
Finish : Electro Tinned
Screws : Zinc Plated Steel

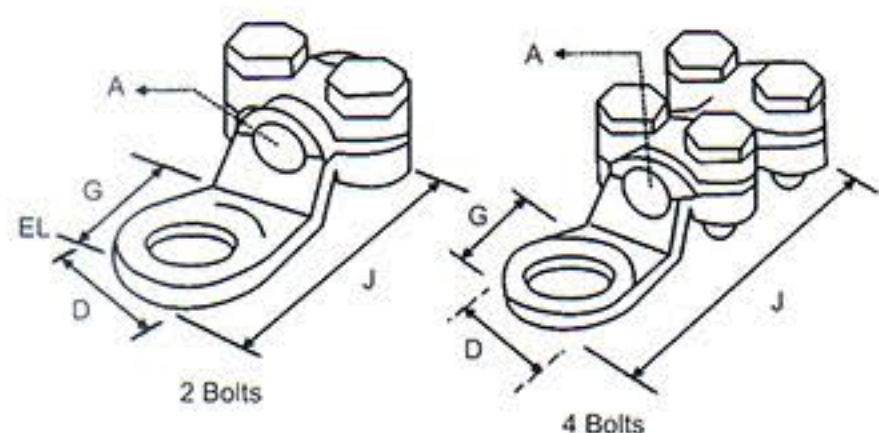

Cable mm2	DIMENSIONS IN mm						Cat #
	A	G	D	J	Type	Screw Size	
10	4.0	06.0	15.0	32.5	2 Bolt	M-5	M2B10
16	5.1	08.5	17.0	37.0	2 Bolt	M-5	M2B16
25	6.3	08.5	18.75	42.0	2 Bolt	M-5	M2B25
35	7.5	10.5	21.5	47.0	2 Bolt	M-5	M2B35
50	9.5	10.5	23.0	56.5	4 Bolt	M-6	M4B50
75	11.0	13.25	26.0	61.0	4 Bolt	M-6	M4B75
100	13.0	14.30	29.0	65.0	4 Bolt	M-6	M4B100
120	14.0	14.80	32.0	71.0	4 Bolt	M-6	M4B120
170	16.0	16.0	33.0	81.0	4 Bolt	M-8	M4B170
200	17.0	17.0	35.0	85.0	4 Bolt	M-8	M4B200
250	18.0	17.0	38.0	87.5	4 Bolt	M-8	M4B250
300	21.0	19.8	45.0	118.0	4 Bolt	M-10	M4B300
400/500	25.5	22.0	53.0	132.0	4 Bolt	M-10	M4B400/500
700	34.0	22.0	60.0	150.0	4 Bolt	M-10	M4B700

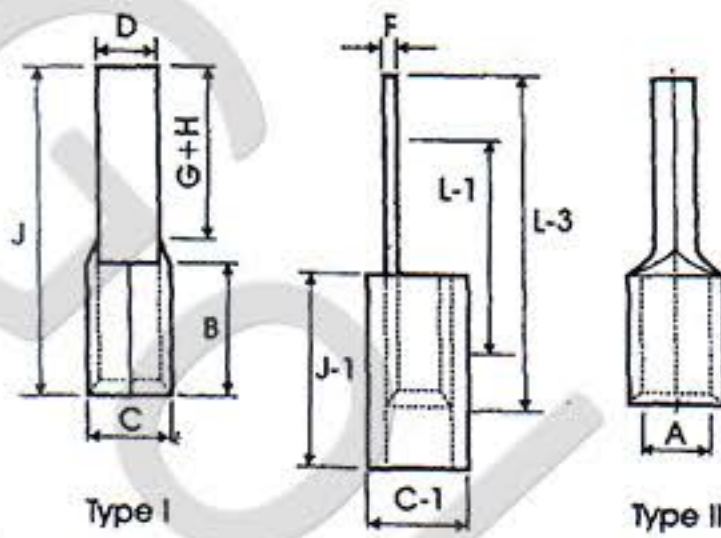**PIN TYPE TINNED COPPER CABLE TERMINAL ENDS
(NON INSULATED & INSULATED)**


MATERIAL: E - COPPER

FINISH: ELECTRO TINNED




COLOUR CODING OF
INSULATION SLEEVE

SIZE - COLOUR
1.5 - RED
2.5 - BLUE
4 - 6 - YELLOW

Cable mm ²	Stud Hole	Dimensions								Cat # Non Insulated	Dimensions		Cat # Insulated
		A	C	D	F	B	G + H	J	TYPE		C - 1	J - 3	
01.5	-	1.6	3.2	1.9	0.8	5	10	17	I	PT 1.5	4.8	10	PTI 1.5
02.5	-	2.3	3.9	1.9	0.8	5	10	17	I	PT 2.5	5.5	10	PTI 2.5
02.5	-	2.3	3.9	3.1	0.8	5	10	17	II	PT 2.5	5.5	10	PTI 2.5
4	-	2.9	4.9	2.7	1	6	10	20	I	PT 4	7.1	14	PTI 4
4	-	3.6	5.6	5.1	1	6	10	20	II	PT 4	7.1	14	PTI 4
6	-	3.6	5.6	2.7	1	6	10	20	I	PT 6	7.1	14	PTI 6
6	-	4.0	6	2.7	1	6	10	20	I	PT 6	7.9	14	PTI 6
10	2.4	4.5	6.7	4.3	1.1	8	12	22	II	PT 10 - 2.4	7.9	16	PTI 10 - 2.4
16	2.6	5.8	8.2	5.5	1.2	10	13	26	II	PT 16 - 2.6	10.0	20	PTI 16 - 2.6
25	3.8	7.5	11.1	7.2	1.8	11	15	33	II	PT 25 - 3.8			
35	3.8	9.0	12.6	8.2	1.8	12	15	33	II	PT 35 - 3.8			
50	3.8	10.5	14.1	9.0	1.8	16	17	41	II	PT 50 - 3.8			
70	4.1	12.0	16.0	10.0	2.0	16	16	46	II	PT 70 - 4.1			
95	4.8	13.5	18.1	10.0	2.3	20	20	51	II	PT 95 - 4.8			


SNAP ON TERMINALS

MATERIAL: E - COPPER • FINISH: ELECTRO TINNED

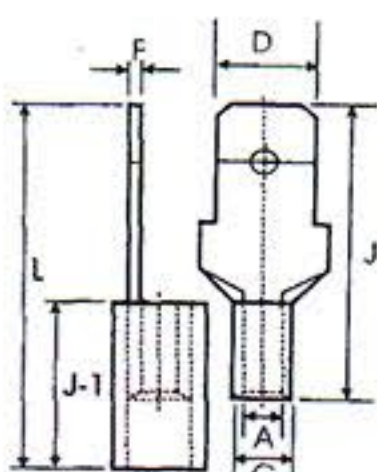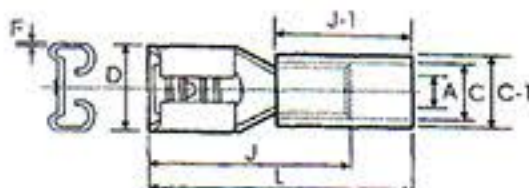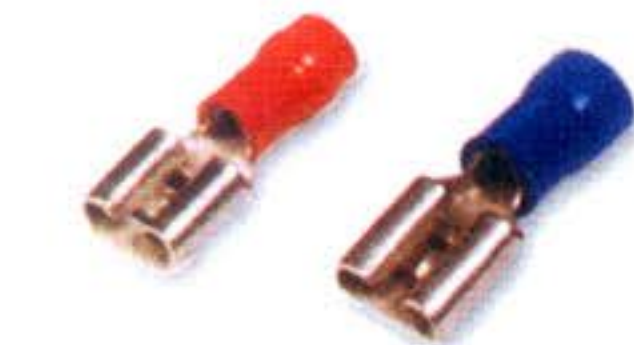


Size mm ²	Dimensions								Cat #
	D	J	A	C	F	J-1	L	C-1	
1.5	6.6	16	2.4	3.2	0.4	-	-	-	ST 1.5
1.5	6.6	16	2.4	3.2	0.4	10	21	4.8	ST 1.5 (1)
2.5	6.6	16	3.1	3.9	0.4	-	-	-	ST 2.5
2.5	6.6	16	3.1	3.9	0.4	10	21	5.5	ST 2.5 (1)
4-6	6.6	19	3.8	5.5	0.8	-	-	-	ST 4.6
4-6	6.6	19	3.8	5.5	0.8	14	26	7.1	ST 4.6 (1)
1.5	6.4	20	1.6	3.2	0.8	-	-	-	ST 1.5
1.5	6.4	20	1.6	3.2	0.8	10	23	4.8	ST 1.5 (1)
2.5	6.4	20	2.3	3.9	0.8	-	-	-	ST 2.5
2.5	6.4	20	2.3	3.9	0.8	10	23	5.5	ST 2.5 (1)
4-6	6.4	20	3.8	5.5	0.8	-	-	-	ST 4.6
4-6	6.4	20	3.8	5.5	0.8	14	25	7.1	ST 4.6 (1)

RING TYPE TINNED COPPER CABLE TERMINAL ENDS (NON INSULATED & INSULATED)

MATERIAL : E - COPPER

FINISH : ELECTRO TINNED


COLOUR CODING OF
INSULATION SLEEVE

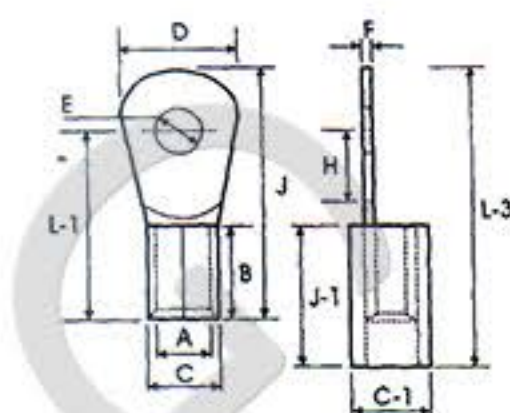SIZE - COLOUR
1.5 - RED
2.5 - BLUE
4 - 6 - YELLOW


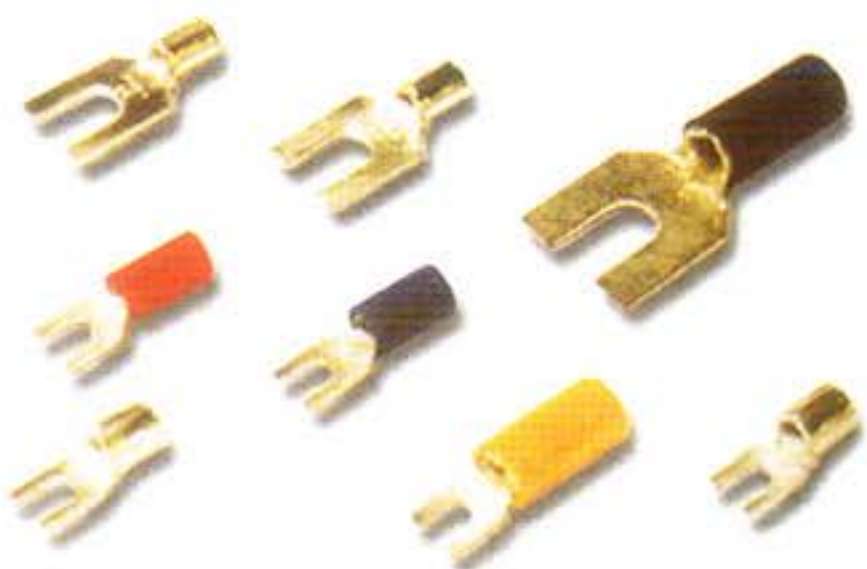
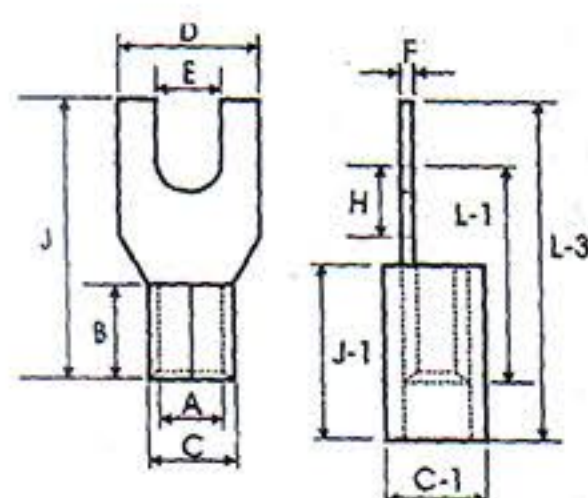
Cable mm ²	Stud Hole	Dimensions								Cat # Non Insulated	Dimensions			Cat # Insulated
		A	C	D	F	B	H	L-1	J		J - 1	L - 3	C-1	
1.5	2.2	1.6	3.2	6	0.8	5	4	11	14	RT - 1.5 - 2.2	10	16	4.8	RT - 1.5 - 2.2
	2.6	1.6	3.2	6	0.8	5	4	11	14	RT - 1.5 - 2.6	10	16	4.8	RT - 1.5 - 2.6
	3.2	1.6	3.2	6	0.8	5	4	11	14	RT - 1.5 - 3.2	10	16	4.8	RT - 1.5 - 3.2
	3.7	1.6	3.2	6	0.8	5	4	11	14	RT - 1.5 - 3.7	10	16	4.8	RT - 1.5 - 3.7
	4.2	1.6	3.2	6	0.8	5	4	11	14	RT - 1.5 - 4.2	10	16	4.8	RT - 1.5 - 4.2
	5.2	1.6	3.2	8	0.8	5	5	12	16	RT - 1.5 - 5.2	10	17	4.8	RT - 1.5 - 5.2
	6.4	1.6	3.2	10	0.8	5	6	13	18	RT - 1.5 - 6.4	10	18	4.8	RT - 1.5 - 6.4
2.5	3.2	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	RT - 2.5 - 3.2	10	14.5	5.5	RT - 2.5 - 3.2
	3.7	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	RT - 2.5 - 3.7	10	14.5	5.5	RT - 2.5 - 3.7
	4.2	2.3	3.9	8	0.8	5	5	12	16	RT - 2.5 - 4.2	10	17	5.5	RT - 2.5 - 4.2
	5.2	2.3	3.9	8	0.8	5	5	12	16	RT - 2.5 - 5.2	10	17	5.5	RT - 2.5 - 5.2
	6.4	2.3	3.9	10	0.8	5	7	13	18	RT - 2.5 - 6.4	10	18	5.5	RT - 2.5 - 6.4
	8.2	2.3	3.9	12	0.8	5	9	16	22	RT - 2.5 - 8.2	10	21	5.5	RT - 2.5 - 8.2
	8.2	2.3	3.9	16	0.8	5	10	17	25	RT - 2.5 - 8.2	10	22	5.5	RT - 2.5 - 8.2
	10.2	2.3	3.9	16	0.8	5	10	17	25	RT - 2.5 - 10.2	10	22	5.5	RT - 2.5 - 10.2
	12.7	2.3	3.9	18	0.8	5	14	20	29	RT - 2.5 - 12.7	10	25	5.5	RT - 2.5 - 12.7
4-6	4.2	3.5	5.5	10	1	6	5	14	19	RT - 4.6 - 4.2	14	22	7.1	RT - 4.6 - 4.2
	5.2	3.5	5.5	10	1	6	5	14	19	RT - 4.6 - 5.2	14	22	7.1	RT - 4.6 - 5.2
	6.4	3.5	5.5	12	1	6	6	14	20	RT - 4.6 - 6.4	14	22	7.1	RT - 4.6 - 6.4
	8.2	3.5	5.5	12	1	6	6	14	20	RT - 4.6 - 8.2	14	22	7.1	RT - 4.6 - 8.2
	8.2	3.5	5.5	14	1	6	10.5	18.5	25.5	RT - 4.6 - 8.2	14	26.5	7.1	RT - 4.6 - 8.2
	9.7	3.5	5.5	14	1	6	10.5	18.5	25.5	RT - 4.6 - 9.7	14	26.5	7.1	RT - 4.6 - 9.7
10	4.2	4.3	6.3	10	1	8	7	17	22	RT - 10 - 4.2				
	5.2	4.3	6.3	10	1	8	7	17	22	RT - 10 - 5.2				
	6.4	4.3	6.3	12	1	8	7	17	23	RT - 10 - 6.4				
	8.2	4.3	6.3	16	1	8	7	19	27	RT - 10 - 8.2				
	10.2	4.3	6.3	22	1	8	10	23	34	RT - 10 - 10.2				
	12.7	4.3	6.3	22	1	8	10	23	34	RT - 10 - 12.7				
16	6.4	5.6	8	16	1.2	10	8	22	30	RT - 16 - 6.4				
	8.2	5.6	8	16	1.2	10	8	22	30	RT - 16 - 8.2				
	10.2	5.6	8	22	1.2	10	8	24	35	RT - 16 - 10.2				
	12.7	5.6	8	22	1.2	10	8	24	35	RT - 16 - 12.7				
25	6.4	7.5	11.1	16	1.8	11	6	22	30	RT - 25 - 6.4				
	8.2	7.5	11.1	16	1.8	11	6	22	30	RT - 25 - 8.2				
	10.2	7.5	11.1	16	1.8	11	6	22	30	RT - 25 - 10.2				
	12.7	7.5	11.1	22	1.8	11	14	31	42	RT - 25 - 12.7				
35	6.4	9	12.6	16	1.8	12	6	23	31	RT - 35 - 6.4				
	8.2	9	12.6	16	1.8	12	6	23	31	RT - 35 - 8.2				
	10.2	9	12.6	22	1.8	12	15	31	42	RT - 35 - 10.2				
	12.7	9	12.6	22	1.8	12	15	31	42	RT - 35 - 12.7				

RING TYPE TINNED COPPER CABLE TERMINAL ENDS (NON INSULATED)

MATERIAL: E - COPPER • FINISH: ELECTRO TINNED

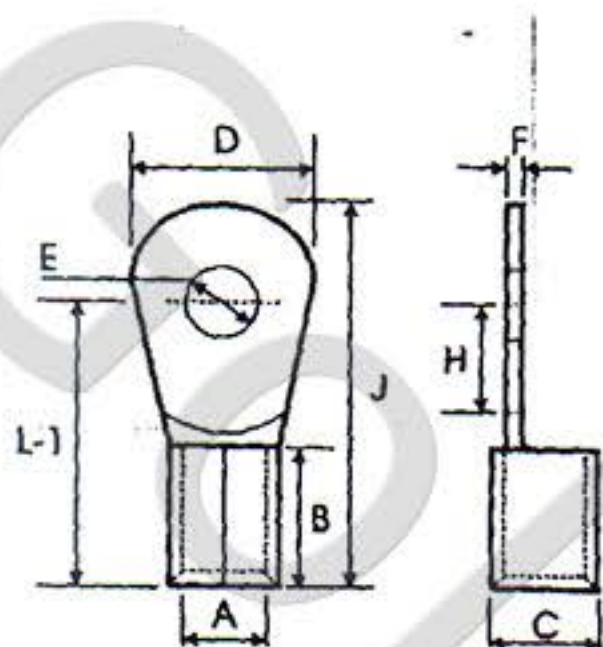

Cable mm ²	Stud Hole	Dimensions								Cat # Non Insulated
		A	C	D	F	B	H	L-1	J	
50	8.2	10.5	14.1	18	1.8	16	12	34	43	RT 50 - 8.2
	10.2	10.5	14.1	24	1.8	16	14	36	48	RT 50 - 10.2
	12.7	10.5	14.1	24	1.8	16	14	36	48	RT 50 - 12.7
	16.2	10.5	14.1	32	1.8	16	15	38	54	RT 50 - 16.2
70	10.2	12	16	22	2	18	11	36	47	RT 70 - 10.2
	12.7	12	16	22	2	18	11	36	47	RT 70 - 12.7
	16.2	12	16	28	2	18	16	40	54	RT 70 - 16.2
95	10.2	13.5	18.1	24	2.3	20	12	38	50	RT 90 - 10.2
	12.7	13.5	18.1	24	2.3	20	12	38	50	RT 90 - 12.7
	16.2	13.5	18.1	28	2.3	20	17	44	58	RT 90 - 16.2
120	12.7	15	20.2	26	2.6	22	7	39	52	RT 120 - 12.7
	20.3	15	20.2	40	2.6	22	20	52	72	RT 120 - 20.3
150	16.2	16.5	23.7	40	3.6	24	20	54	74	RT 150 - 12.7
	20.3	16.5	23.7	40	3.6	24	20	54	74	RT 150 - 20.3



FORK TYPE TINNED COPPER CABLE TERMINAL ENDS (NON INSULATED & INSULATED)


MATERIAL : E - COPPER • FINISH : ELECTRO TINNED

COLOUR CODING OF INSULATION SLEEVE

SIZE - COLOUR
 1.5 - RED
 2.5 - BLUE
 4 - 6 - YELLOW


Cable mm ²	Stud Hole	Dimensions								Cat # Non Insulated	Dimensions			Cat # Insulated
		A	C	D	F	B	H	L-1	J		J - 1	L - 3	C-1	
1.5	5.1	1.6	3.2	8	0.8	5	10.0	21	17	FT 1.5 - 5.1	4.8	10	27	FTI 1.5 - 5.1
1.5	3.5	1.6	3.2	6.8	0.8	4	4.8	13	8.8	FT 1.5 - 3.5	4.8	10	20.8	FTI 1.5 - 3.5
1.5	3	2	2.8	6.2	0.4	5	3.1	13	10.5	FT 1.5 - 3	4.8	10	20.5	FTI 1.5 - 3
2.5	3.5	2.3	3.9	6.5	0.8	5	4.3	15	11.8	FT 2.5 - 3.5	5.5	10	21.8	FTI 2.5 - 3.5
2.5	5	2.6	4.6	10.6	1.6	6.2	6.2	21	12.4	FT 2.5 - 5	5.5	10	20	FTI 2.5 - 5
4 - 6	3.1	3.5	5.5	6	1	6	5.5	15	11.5	FT 4 - 6 - 3.1	7.1	14	27.5	FTI 4 - 6 - 3.1
4 - 6	3.5	3.5	5.5	6	1	6	5.0	15	11	FT 4 - 6 - 3.5	7.1	14	27	FTI 4 - 6 - 3.5
10	6.5	4.5	6.9	16	1.2	8	11.0	27	19	FT 10 - 6.5	7.9	16	35	FTI 10 - 6.5
10	8.2	4.5	6.9	16	1.2	8	11.0	27	19	FT 10 - 8.2	7.9	16	35	FTI 10 - 8.2

INSULATED BLADE TERMINAL

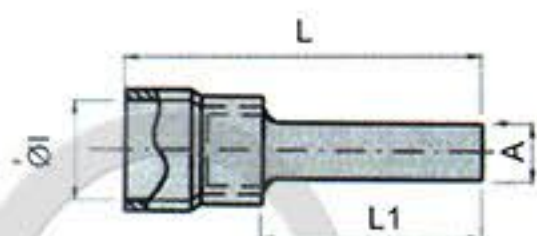



Section	Dimensions				Cat #
	A	I	L	L1	
1.5	2.8	4.0	18.0	9.0	BT1.5-2.8
	2.3	4.0	27.2	18.2	BT1.5-2.3
2.5	2.8	4.5	18.0	9.0	BT2.5-2.8
	4.8	4.5	27.2	18.2	BT2.5-2.3
6.0	2.8	6.8	23.5	10.0	BT6-2.8
	4.5	6.8	31.7	18.2	BT6-2.3

FULLY INSULATED FEMALE CONNECTOR

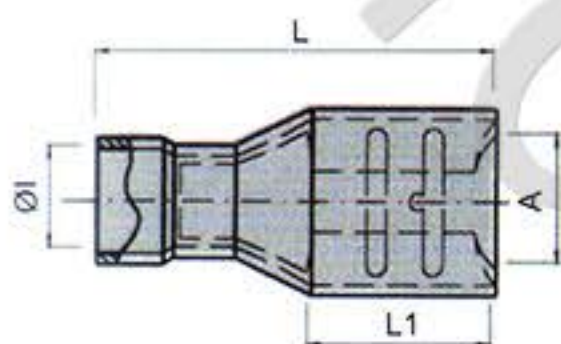


Section	Dimensions					Cat #
	A	L	L1	1	Thickness	
1.5	6.6	22.2	6.8	2.7	0.8	FIFC1.5-6
2.5		22.2		3.2		FIFC2.5-6
6.0		22.2		3.8		FIFC6-6

INSULATED MALE TERMINAL

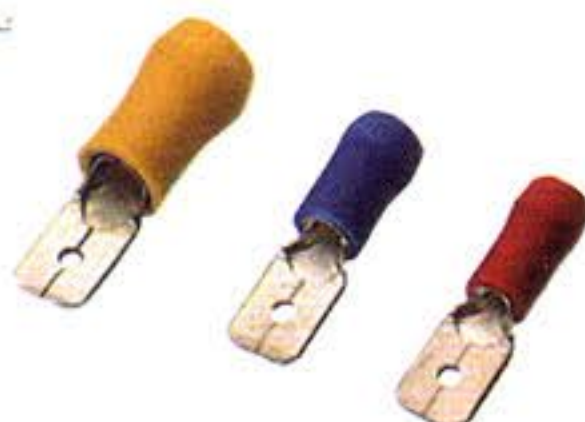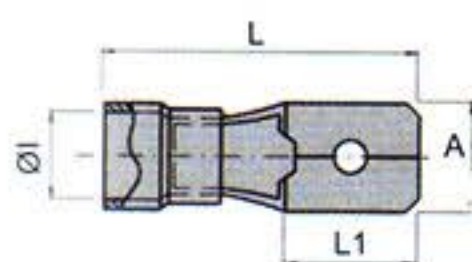

Section	Dimensions					Cat #
	A	L	L1	1	Thickness	
1.5	6.6	20.5	8.0	3.5	0.8	MT1.5-6
2.5	6.6	20.5		4.3		MT2.5-6
6.0	6.6	24.5		6.2		MT6.0-6


INSULATED BUTT CONNECTOR

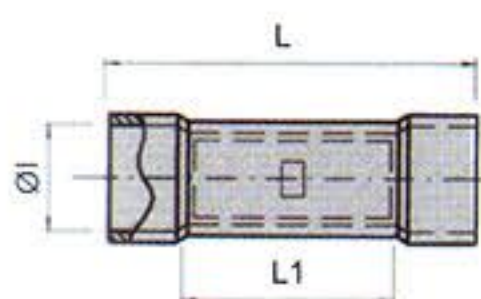

Section	Dimensions			Cat #
	L	L1	1	
1.5	22.7	15.0	4.0	BC1.5-22
2.5	22.7	15.0	4.5	BC2.5-22
6.0	26.7	15.0	6.8	BC6.0-22

TYPE : 'C' TYPE CONNECTORS

Material : E-Copper
Finish : Electro Tinned / Untinned

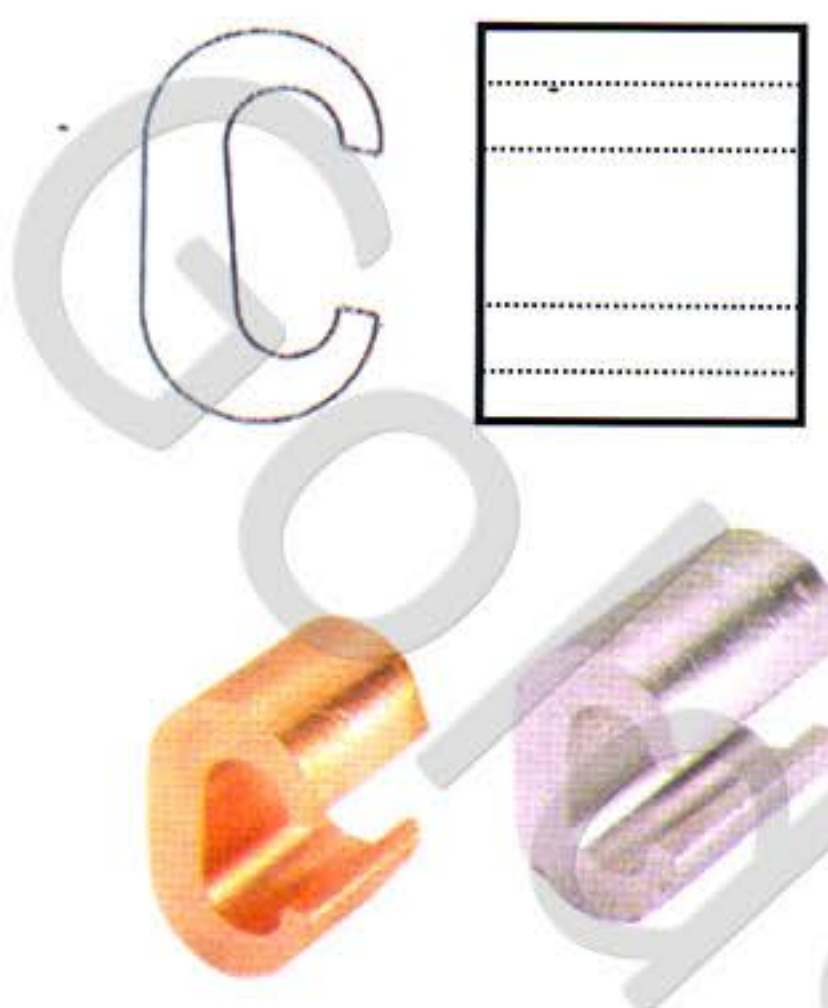


Conductor Minimum	Maximum	Type	Cat #
16	35	C	CC 16 - 35
25	35	C	CC 25 - 35
50	70	C	CC 50 - 70
70	70	C	CC 70 - 70
95	120	C	CC 95 - 120
120	120	Tap	CC 120 - 120
120	240	C	CC 120 - 240
150	240	C	CC 150 - 240


TYPE : ALUMINIUM LINE TAP ('V' TYPE)

Material : Electrolytic Grade High Strength Aluminium Alloy

Finish : Natural & Degreased

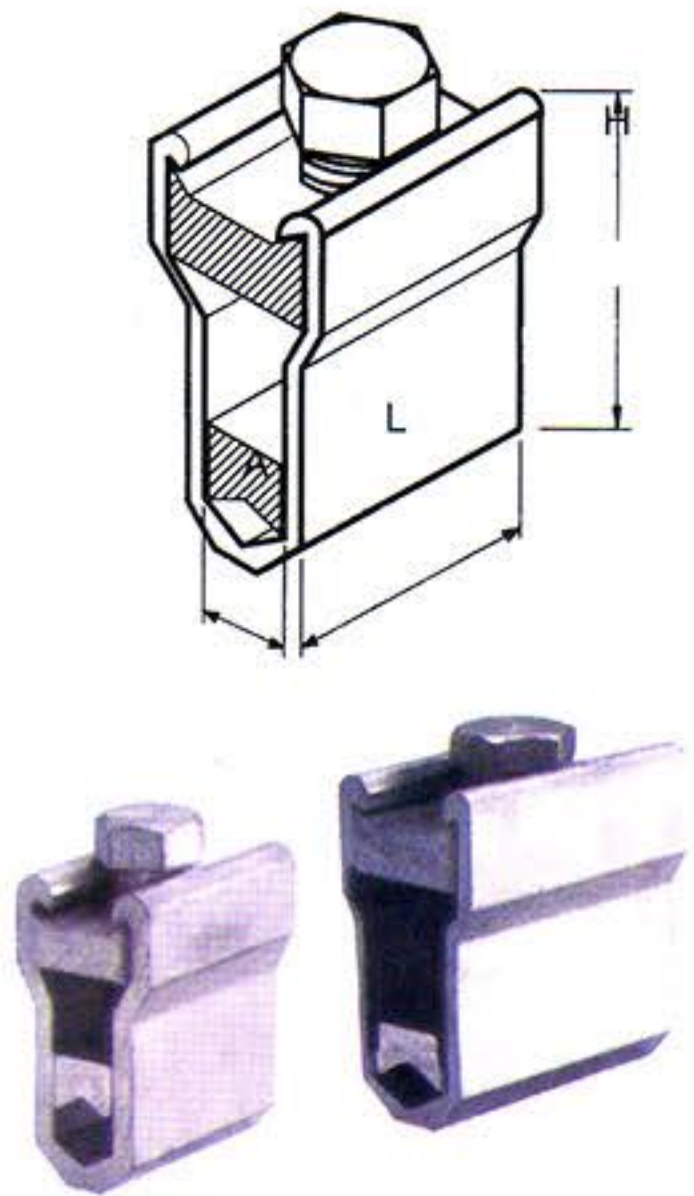

CABLE mm2	DIMENSIONS IN mm			Cat #
	A	B	L	
16-25	11.2	41	32	ALT 16-25
35-50	10	41	32	ALT 35-50
50-70	10	41	32	ALT 50-70
95-100	15	57	51	ALT 95-100

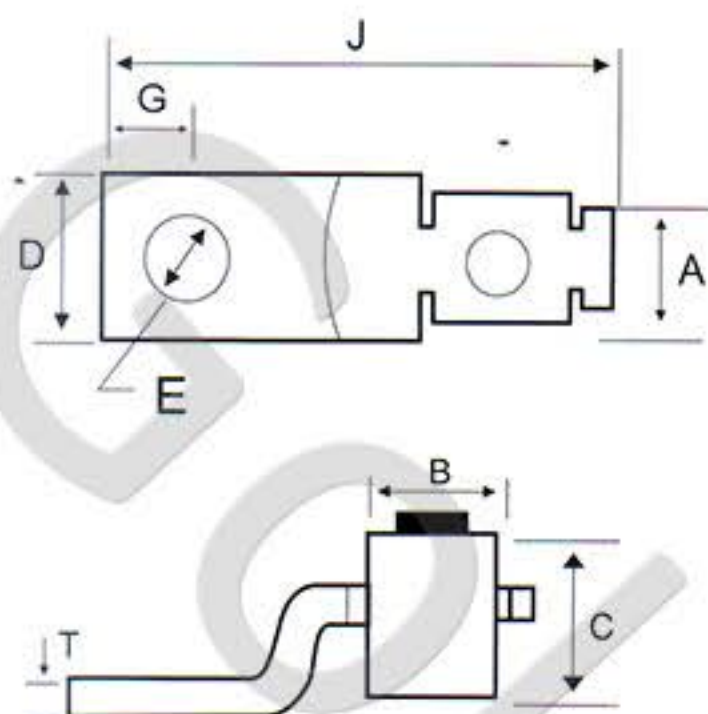


COPPER TONGUE TERMINAL

TYPE : COPPER ONE HOLE OFFSET TONGUE TERMINAL ENDS / CONNECTORS

Material : E-copper
Finish : Copper
Steel Screws : Zinc Plated




Copper Conductor Size Range	Current Rating (Amps)	DIMENSION IN inches								Cat #
		J	D	G	E	T	B	C	A	
14-6	35	1.19	0.38	0.23	0.25	0.07	0.43	0.50	0.33	CTT - 35
14-4	50/70	1.31	0.50	0.25	0.28	0.08	0.43	0.56	0.38	CTT - 70
12-2	90	1.55	0.50	0.25	0.34	0.09	0.50	0.65	0.47	CTT - 90
8- 1/0	125	1.97	0.63	0.50	0.28	0.13	0.63	0.88	0.62	CTT - 125
4-3/0	175	2.19	0.75	0.44	0.50	0.13	0.75	1.03	0.71	CTT - 175
6-4/0	225	2.38	1.00	0.47	0.56	0.13	1.00	1.17	0.75	CTT - 225
1/0-350	300	3.16	1.00	0.50	0.94	0.19	1.23	1.39	1.00	CTT - 300
4/0-500	400	4.25	1.50	0.88	1.00	0.19	1.50	1.57	1.16	CTT - 400
600- 1000	650	4.63	2.00	1.16	0.69	0.25	1.88	2.34	1.68	CTT - 650

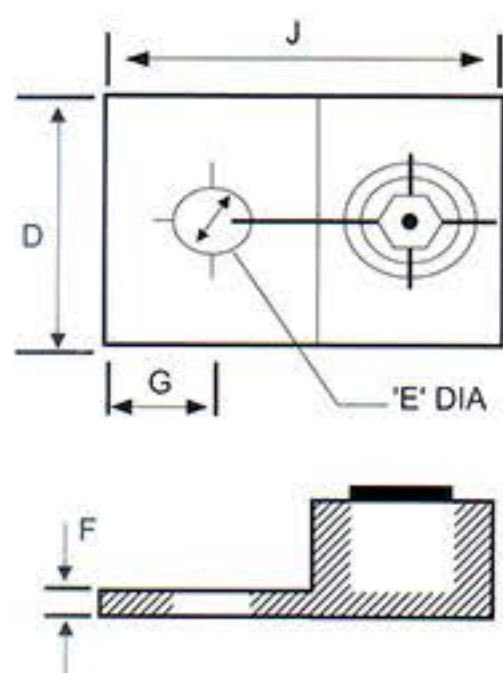

ALUMINIUM SINGLE BARREL CONNECTOR, ONE HOLE MOUNT

Material : Aluminium
Finish : Electro Tinned


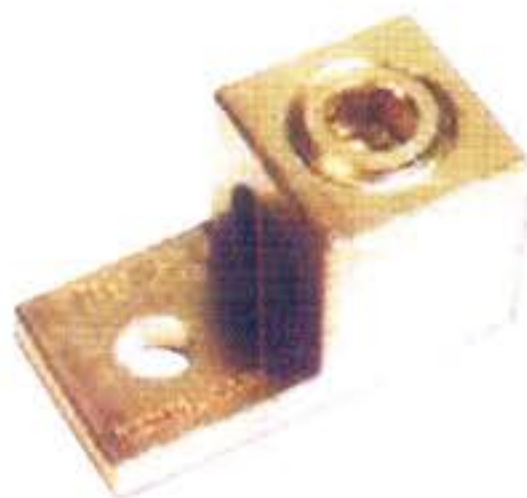


Conductor Range (Al. or Cu.)		DIMENSIONS IN mm & (inches)					Cat #
MAX.	MIN.	J	D	G	E (Bolt hole)	F	
4 STR	14AWG	27.00 (1.10)	12.70(0.50)	5.95 (0.23)	1/4	2.40 (0.09)	ASBC - 4
2STR	14AWG	29.40(1.15)	12.70(0.50)	7.55(0.29)	1/4	2.75(0.10)	ASBC - 2
1/0 STR	14AWG	37.10(1.46)	15.90(0.62)	11.10(0.43)	1/4	4.70(0.18)	ASBC - 1/0
2/0,STR	14AWG	37.10(1.46)	15.90(0.62)	11.10(0.43)	1/4	4.70(0.18)	ASBC - 2/0
250 KCMIL	6 STR	50.60 (2.00)	21.75(0.85)	12.75(0.50)	5/16	6.40(0.25)	ASBC - 250
300 KCMIL	6 STR	50.60 (2.00)	21.75(0.85)	11.90(0.46)	5/16	6.40(0.25)	ASBC - 300
350 KCMIL	6 STR	57.15 (2.25)	28.60(1.12)	12.70(0.50)	3/8	6.40(0.25)	ASBC - 350
500 KCMIL	4 STR	71.50 (2.81)	38.10 (1.50)	19.05(0.75)	3/8	8.00(0.31)	ASBC - 500
600 KCML	2 STR	81.00(3.19)	38.10(1.50)	20.60(0.81)	3/8	11.10(0.43)	ASBC - 600
800 KCMIL	300 KCMIL	85.70 (3.37)	44.50(1.75)	22.20(0.87)	5/8	12.70(0.50)	ASBC - 800
1000 KCMIL	500 KCMIL	85.70(3.37)	44.50(1.75)	22.20(0.87)	5/8	12.70(0.50)	ASBC - 1000

ALUMINIUM BARREL CONNECTORS

TYPE : ALUMINIUM DOUBLE BARREL CONNECTOR, ONE HOLE MOUNT

Material : Aluminium
Finish : Electro Tinned

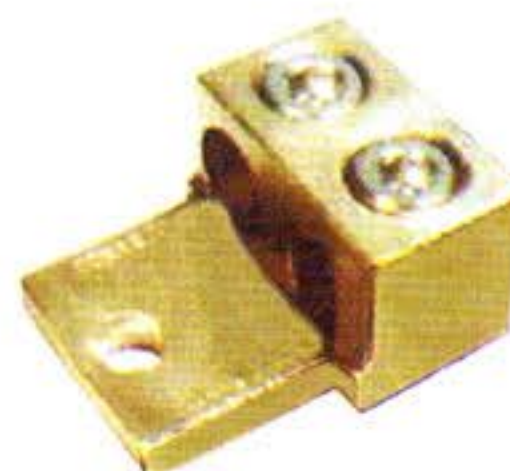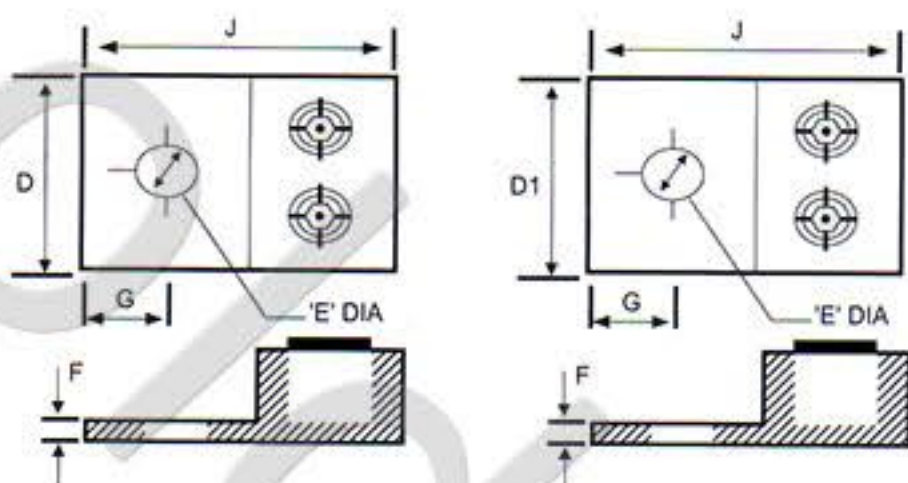


Conductor Range		DIMENSION IN mm & inches						Cat #
Max.	Min.	J	D	G	E	F	D1	
1/0 STR	14AWG	37.10 (1.46)	30.95(1.22)	11.10 (0.43)	1/4	4.70 (0.18)	-	ADBC - 1
2/0 STR	14AWG	37.10(1.46)	31.75(1.25)	10.70(0.42)	1/4	4.70 (0.18)	-	ADBC - 2
250 KCMIL	6 STR	65.10 (2.56)	41.70(1.64)	22.20(0.87)	3/8	6.40 (0.25)	38.1(1.50)	ADBC - 250
350 KCMIL	6STR	73.00(2.87)	48.60(1.91)	22.20(0.87)	1/2	6.40(0.25)	44.8(1.76)	ADBC - 350
600 KCMIL	2 STR	81.00(3.19)	61.10(2.40)	15.90 (0.62)	1/2	11.10 (0.43)	50.4 (1.98)	ADBC - 600
800 KCMIL	300 KCMIL	85.70(3.37)	80.90(3.18)	22.20(0.87)	5/8	12.70 (0.50)	50.4 (1.98)	ADBC - 800
1000 KCMIL	500 KCMIL	85.70 (3.37)	80.90 (3.18)	22.20 (0.87)	5/8	12.70 (0.50)	-	ADBC - 1000



Other types and sizes of Aluminium Mechanical lugs like 2 Hole Palm 2 Hole Screw, 3 Hole Palm 2 Hole Screw, 3 Hole Palm 3 Hole Screw etc. can be made on demand and or customers specifications

ALUMINIUM DOUBLE BARREL CONNECTOR, TWO HOLE MOUNT

Material : Aluminium
Finish : Electro Tinned

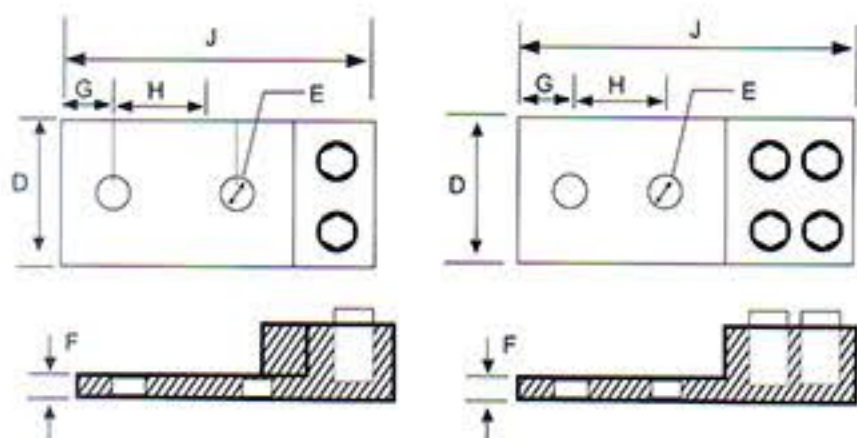


Conductor Size		Min.	DIMENSION IN mm & inches						Cat #
Max.	Min.		J	D	F	G	H	TYPE	
350 KCMIL	6STR	1/2	104.65(4.12)	48.51 (1.91)	7.87(0.31)	15.75(0.62)	44.45(1.75)	I	ABTH - 350
600 KCMIL	4 STR	1/2	141.73 (5.58)	60.96 (2.40)	11.17 (0.44)	15.75 (0.62)	44.45 (1.75)	II	ABTH - 600
800 KCMIL	350 KCMIL	1/2	147.82 (5.82)	81.03 (3.19)	12.70 (0.50)	15.75 (0.62)	44.45 (1.75)	II	ABTH - 800


TINNED COPPER FLEXIBLE BRAIDS

TYPE : TINNED COPPER FLEXIBLE BRAIDS CRIMPED WITH CONNECTORS / TERMINALS

Material : E-copper
Finish : Electro Tinned

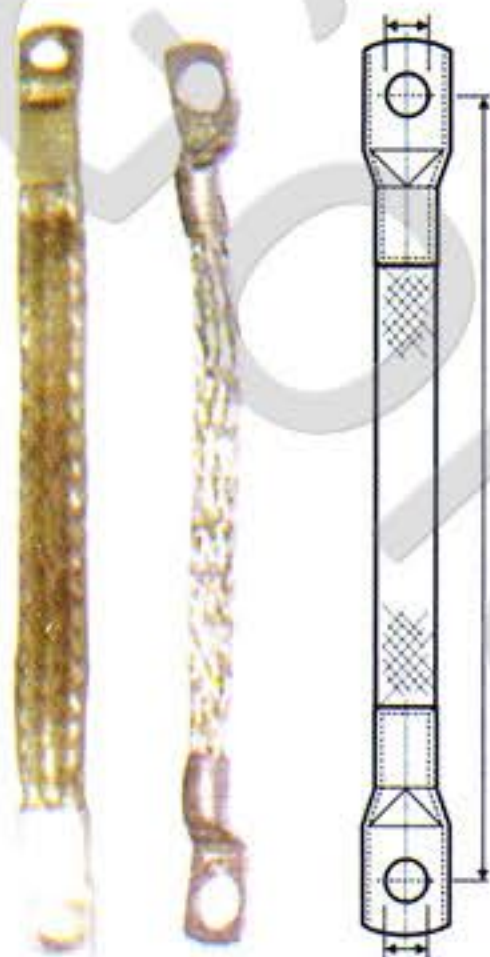

FCBL - CRIMPED WITH LUGS

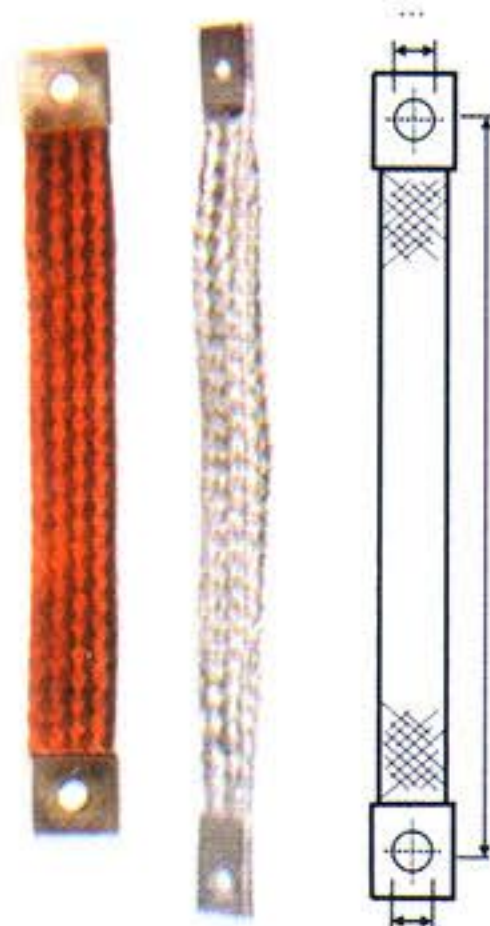

FCBC - CRIMPED WITH CONNECTOR

SIZE mm ²	DIMENSIONS IN mm		CURRENT RATING AMP	Cat # (crimped with lugs)	Cat # (crimped with connectors)
	J	E			
4	50	6	50	CL 50 - 50	CC 50 - 50
	100	6	50	CL 100 - 50	CC 100 - 50
	150	6	50	CL 150 - 50	CC 150 - 50
	200	6	50	CL 200 - 50	CC 200 - 50
10	50	6	90	CL 50 - 90	CC 50 - 90
	100	6	90	CL 100 - 90	CC 100 - 90
	150	6	90	CL 150 - 90	CC 150 - 90
	200	6	90	CL 200 - 90	CC 200 - 90
16	100	8.5	125	CL 100 - 125	CC 100 - 125
	150	8.5	125	CL 150 - 125	CC 150 - 125
	200	8.5	125	CL 200 - 125	CC 200 - 125
	250	8.5	125	CL 250 - 125	CC 250 - 125
	300	8.5	125	CL 300 - 125	CC 300 - 125
25	100	10	160	CL 100 - 160	CC 100 - 160
	150	10	160	CL 150 - 160	CC 150 - 160
	200	10	160	CL 200 - 160	CC 200 - 160
	250	10	160	CL 250 - 160	CC 250 - 160
	300	10	160	CL 300 - 160	CC 300 - 160
30	100	10	180	CL 100 - 180	CC 100 - 180
	150	10	180	CL 150 - 180	CC 150 - 180
	200	10	180	CL 200 - 180	CC 200 - 180
	250	10	180	CL 250 - 180	CC 250 - 180
	300	10	180	CL 300 - 180	CC 300 - 180
35	100	10	210	CL 100 - 210	CC 100 - 210
	150	10	210	CL 150 - 210	CC 150 - 210
	200	10	210	CL 200 - 210	CC 200 - 210
	250	10	210	CL 250 - 210	CC 250 - 210
	300	10	210	CL 300 - 210	CC 300 - 210
50	100	12	250	CL 100 - 250	CC 100 - 250
	150	12	250	CL 150 - 250	CC 150 - 250
	200	12	250	CL 200 - 250	CC 200 - 250
	250	12	250	CL 250 - 250	CC 250 - 250
	300	12	250	CL 300 - 250	CC 300 - 250

Also available with other hole size, current rating, lengths etc, as per customer specification.